


# Water

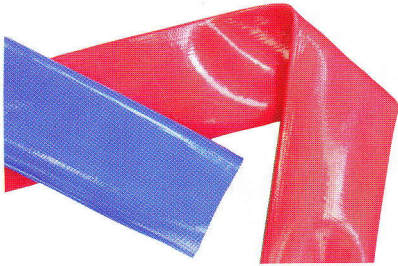

## Flat hoses.

Three layer design in PVC with polyester fibre reinforcement. Blue exterior covering for Tricoflat or red for Supertricoflat.

## Advantages

The polyester fibre reinforcement gives Tricoflat (blue) and Super Tricoflat (red) excellent pressure, tensile and tear resistance. These robust hoses also demonstrate excellent resistance to UV rays, abrasion and crushing.

The inner and outer layers are made of PVC, whose flexibility provides greater ease of use and handling. Flat storage helps reduce cluttering. After use, cleaning is easy, with no

need for drying. The perfectly smooth inner surface decreases load losses.

The bright colours make identification easy.

## Connectors

Cam, semi-symmetrical or Storz connectors.

Band collars. In order to avoid damaging the hose during installation of the collars, it is recommended that before tightening each end be protected with a sleeve that can simply be a 10 cm length taken from the hose itself.

## Chemical resistance

See table pages 47 to 51 column A.

## Applications

- Water supply and irrigation

## Sectors of activity

- Farms
- Building trades and road works
- Industry

# TRICOFLAT®

+60  
°C  
-15

Marking : TRICOFLAT Ø inn [batch number]

mm	± mm	mm	± mm	g/m	Bar	daN	€/m	Blue			
								25 m	50 m	100 m	
19	+/- 1	1,8	+/- 0,2	150	39	13	350	1,75	140573		
25	+/- 1	1,8	+/- 0,2	190	36	12	350	2,19	140602	140615	
32	+/- 1	1,8	+/- 0,2	240	30	10	400	2,74	140631	140644	
35	+/- 1	1,8	+/- 0,2	280	24	8	500	3,17	140005	140016	
40	+/- 1	2	+/- 0,2	320	24	8	550	3,62	140027	140038	140041
45	+/- 1	2	+/- 0,2	350	24	8	600	3,97	140054	140067	
52	+/- 1	2	+/- 0,2	410	24	8	680	4,65	140070	140083	140096
55	+/- 1	2	+/- 0,2	480	24	8	900	5,26	140109	140112	
63	+/- 1	2,3	+/- 0,2	560	24	8	1250	6,27	140125	140138	140141
70	+/- 1	2,3	+/- 0,2	610	24	8	1650	6,82	140154	140167	
76	+/- 1	2,3	+/- 0,2	680	24	8	1750	7,57	140183	140196	140209
90	+/- 1,5	2,5	+/- 0,2	850	24	8	2200	9,43	140212	140225	
102	+/- 1,5	2,7	+/- 0,2	1000	24	8	2500	11,11	140241	140254	140267
153	+/- 1,5	2,8	+/- 0,2	1600	12	4	2650	17,77	140270	140283	140692
203	+/- 1,5	3	+/- 0,2	2300	8	2,5	3400	25,39		140689	



Standard quality.  
Blue cover.



- 1 Flexible PVC
- 2 Polyester fibre reinforcement
- 3 Black flexible PVC innertube

# SUPER TRICOFLAT®

+60  
°C  
-15

Marking : SUPERTRICOFLAT Ø inn [batch number]

mm	± mm	mm	± mm	g/m	Bar	daN	€/m	Red	
								25 m	100 m
40	+/- 1	3	+/- 0,5	500	51	17	1000	5,20	140296 140312
45	+/- 1	3	+/- 0,5	550	51	17	1000	5,80	140325
52	+/- 1	3	+/- 0,5	600	48	16	1050	7,28	140357 140373
55	+/- 1	2,9	+/- 0,5	650	48	16	1050	7,77	140386
63	+/- 1	3,3	+/- 0,5	800	48	16	1600	9,69	140402
70	+/- 1	3,3	+/- 0,5	900	42	14	2000	10,43	140431
76	+/- 1	3,3	+/- 0,5	960	36	12	2200	11,62	140457 140473
90	+/- 1,5	3,3	+/- 0,5	1150	36	12	2800	14,00	140486
102	+/- 1,5	3,6	+/- 0,5	1400	33	11	3300	16,90	140515 140531
153	+/- 1,5	4,3	+/- 0,5	2500	21	7	3300	30,16	140544 140560

Heavy duty.  
Red cover.



- 1 Flexible PVC
- 2 Polyester fibre reinforcement
- 3 Black flexible PVC innertube