

NEW

Gardenline

Landscape DripperLine



Gardenline dripper line is specifically designed for irrigation of plants in gardens, public areas or commercial landscape sites. The brown UV protected tube can be laid on the surface or under mulch materials and provides reliable and consistent watering.



For more information on Gardenline or any of KAR's irrigation products please call us on:

0161 793 9703





Gardenline

Landscape DripperLine



Primary applications:

- Shrubs, trees and flowerbeds
- Slopes, narrow and/or long planted areas
- Subsurface or surface installation

Main features:

- Pressure regulated dripper ensuring uniform distribution of water from every outlet thereby maintaining plant growth uniformity
- Unique labyrinth dripper outlet that is both self flushing and highly clogging resistance thereby minimising dry areas and reducing maintenance requirements
- Brown UV-protected tube that blends into the background for better aesthetics and also reduces unwanted attention
- Durable construction for longer life

Technical information:

- Dripper flow rate: 2.1 litres per hour
- Recommended working pressure: 0.5 to 3.5 Bar
- Recommended filtration: 120 mesh/130 microns
- Coil lengths: 25m and 100m
- Dripper spacing options 33cm and 50cm plus plain tube
- 16mm O.D.

KAR. (U.K.)

Invar Road, Swinton, Manchester, M27 9HF England

Tel: 0161 793 9703

Fax: 0161 794 5145


Web: www.karuk.com

email: sales@karuk.com

Maximum lateral length (meters)

| Dripline flow rate (l/h) | Dripper spacing (cm) | |
|--------------------------|----------------------|-----|
| | 2.1 | 2.1 |
| Inlet pressure (bar) | 33 | 50 |
| 1.5 | 81 | 127 |
| 2.0 | 93 | 146 |
| 2.5 | 103 | 161 |
| 3.0 | 110 | 173 |
| 3.5 | 117 | 184 |

Dripper flow vs pressure

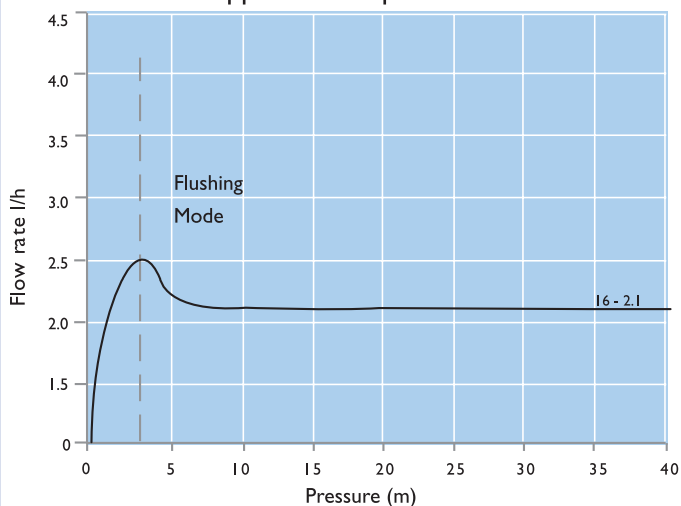

GardenLine

| Catalogue No | Outlet l/h | Spacing cm | Length M | Price Per M £ |
|--------------|------------|------------|----------|---------------|
| 950000050 | Plain Pipe | | 50 | 0.30 |
| 950000100 | Plain Pipe | | 100 | 0.28 |
| 952133025 | 2.1 | 33 | 25 | 0.47 |
| 952133100 | 2.1 | 33 | 100 | 0.42 |
| 952150025 | 2.1 | 50 | 25 | 0.40 |
| 952150100 | 2.1 | 50 | 100 | 0.37 |